

RFP 26-110 Cabling Infrastructure

Mandatory Project Walk Packet · E-Rate Funding Year 2027 (YR30)

Walk date	Saturday, October 10, 2026
Sites	Rocklin Elementary School, 5025 Meyers Street, Rocklin, CA 95677 Rocklin High School, 5301 Victory Lane, Rocklin, CA 95765
Attendance	Mandatory. A Responder that does not attend may be deemed non-responsive (Addendum No. 2).
Questions	In writing only, to ts.rfp@rocklinusd.org

SIGN IN BEFORE YOU WALK

Each attendee provides legible printed name, firm name, title, telephone number and e-mail address, and presents photo identification on request. A business card is sufficient to identify the firm. Attendance is credited to the individual who attends and to the firm that individual represents at sign-in. Where the entity submitting the proposal is not the entity named at sign-in, the proposal must include a signed written statement identifying the individual who attended, the name signed in under, and the relationship. See Addendum No. 5, Item 4.

KEY DATES

DATE	MILESTONE
Saturday, October 10, 2026	Mandatory project walk
Wednesday, October 14, 2026	Addendum answering the remaining written questions, posted by 3:00 p.m.
Friday, October 23, 2026	Question deadline, 3:00 p.m.
Wednesday, October 28, 2026	Final responses posted
Wednesday, December 9, 2026	Proposals due

The USAC portal is the official record

For the E-Rate program the USAC portal is the record relied upon. Where any document posted on the District website differs from the corresponding document posted on the USAC portal, the version posted on the USAC portal governs. This packet is a field aid for the walk. It is not a solicitation document, it does not modify the RFP or any addendum, and nothing in it may be relied upon in place of the issued documents.

How to use this packet

ADDENDA OF RECORD

Acknowledge only these. Earlier versions of Addenda Nos. 1, 2 and 3 dated September 21 and September 22, 2026 are superseded and of no force.

ADDENDUM	ISSUED	SUBJECT
No. 1	September 30, 2026	Site reference data
No. 2	October 1, 2026	Mandatory project walk
No. 3	October 1, 2026	Question and response schedule
No. 4	October 7, 2026	Quantity takeoffs and bid comparison
No. 5	October 9, 2026	Addenda of record; campus plans; hazardous materials and access; walk sign-in; standards and the cable estimate

This packet collects the campus site plans and the building and closet reference data from the issued appendices into a form you can carry and write on. Use it to record what you observe. The District does not provide a quantity takeoff, and the figures reproduced here are reference only.

WHAT THE ESTIMATED CABLE FOOTAGE IN APPENDIX C IS

Estimated Cable (ft.) = Max Length × ((Rooms per Building × Drops per Room) + Extra Cables Needed) × 1.30

Max Length is the longest tested cable run in that building, measured as cable path from the serving switch in the IDF to the furthest drop in that building. That single worst-case length is then applied to every drop in the building, the extra cables identified for that building are added, and a thirty percent allowance for routing, slack, service loops and waste is applied to the total.

The figure is deliberately conservative and is not a takeoff. Because the longest run in a building is applied to every drop in that building, it does not reflect the actual route length of any individual drop, the actual pathway conditions, or the distance of any given room from its serving IDF. It is a planning aid and an upper bound, and nothing more.

WHY THE WALK EXISTS

The walk is your opportunity to walk each building, observe existing field conditions, pathways, ceiling and wall conditions, IDF locations and room layouts, and to take whatever measurements and notes you require in order to arrive at quantities and lengths you are prepared to stand behind. Consistent with the ways-and-means basis of this solicitation and with Requirement 17, each Responder determines and is solely responsible for its own cable lengths, cable quantities, material quantities, pathway and support requirements and labor hours.

A NOTE ON THE QUANTITY COLUMNS

The building tables in this packet reproduce **Rooms per Building** and **Drops per Room** only. The "Extra Cables Needed" and "Estimated Cable (ft.)" columns from Appendix C are *deliberately omitted here*. A written question has been received concerning differences between the extra-run figures carried in different appendices, and the District's response is being issued in a numbered addendum on **Wednesday, October 14, 2026**. Work from the issued appendices and that addendum, not from this packet, for anything bearing on quantity.

Standards, and what is still open

WHERE THE GOVERNING STANDARDS ARE FOUND

PROVISION	LOCATION
Classroom Cabling Standard	RFP 26-110, pages 7 and 8
Cat6A Cable Standard	RFP 26-110, page 8
Requirements for Cabling Infrastructures (1 through 21)	RFP 26-110, pages 13 and 14
Site Conditions and Work Hours, including Ed. Code 45125.1	RFP 26-110, pages 12 and 13
Campus site plans	RFP 26-110, pages 26 and 27

Questions on the application of these standards are submitted in writing by the October 23 deadline. They will not be answered verbally at the walk.


STILL OPEN, AND COMING OCTOBER 14

The following were raised in writing and are being answered in a numbered addendum posted by 3:00 p.m. on Wednesday, October 14, 2026. They are listed so you can direct your field time appropriately today.

- Differences between the extra-run reference quantities carried in different appendices.
- Elementary G and H room groupings, High School R relocatable count, and the Pool configuration.
- Whether existing office, administrative and computer-lab outlets are replaced in addition to the twelve-drop classroom standard.
- Scope treatment of scoreboards, timing systems, door controllers, paging and other non-Ethernet cabled devices.
- Cabinet sizes and configurations where new cabinets are indicated.
- Cabling system, shielding, jack family, colors, patch cords, and treatment of spare ceiling and AP cables.
- Certification standard and test configuration, report format, and device acceptance.
- Extent of existing cable removal, and whether new pathway belongs in the base price where existing pathway cannot take the new cabling.
- Permitted hours, outage restrictions, escorts, device disconnect and reconnect responsibility, and live-until-cutover.
- Shared closet cost allocation, separate building release authorization, and release guarantees.

Rocklin Elementary School · Campus Site Plan

Reproduced from RFP 26-110, page 26. Dated August 23, 2021, updated October 12, 2023. Buildings and rooms are labeled in place on the drawing. 5025 Meyers Street, Rocklin, CA 95677.

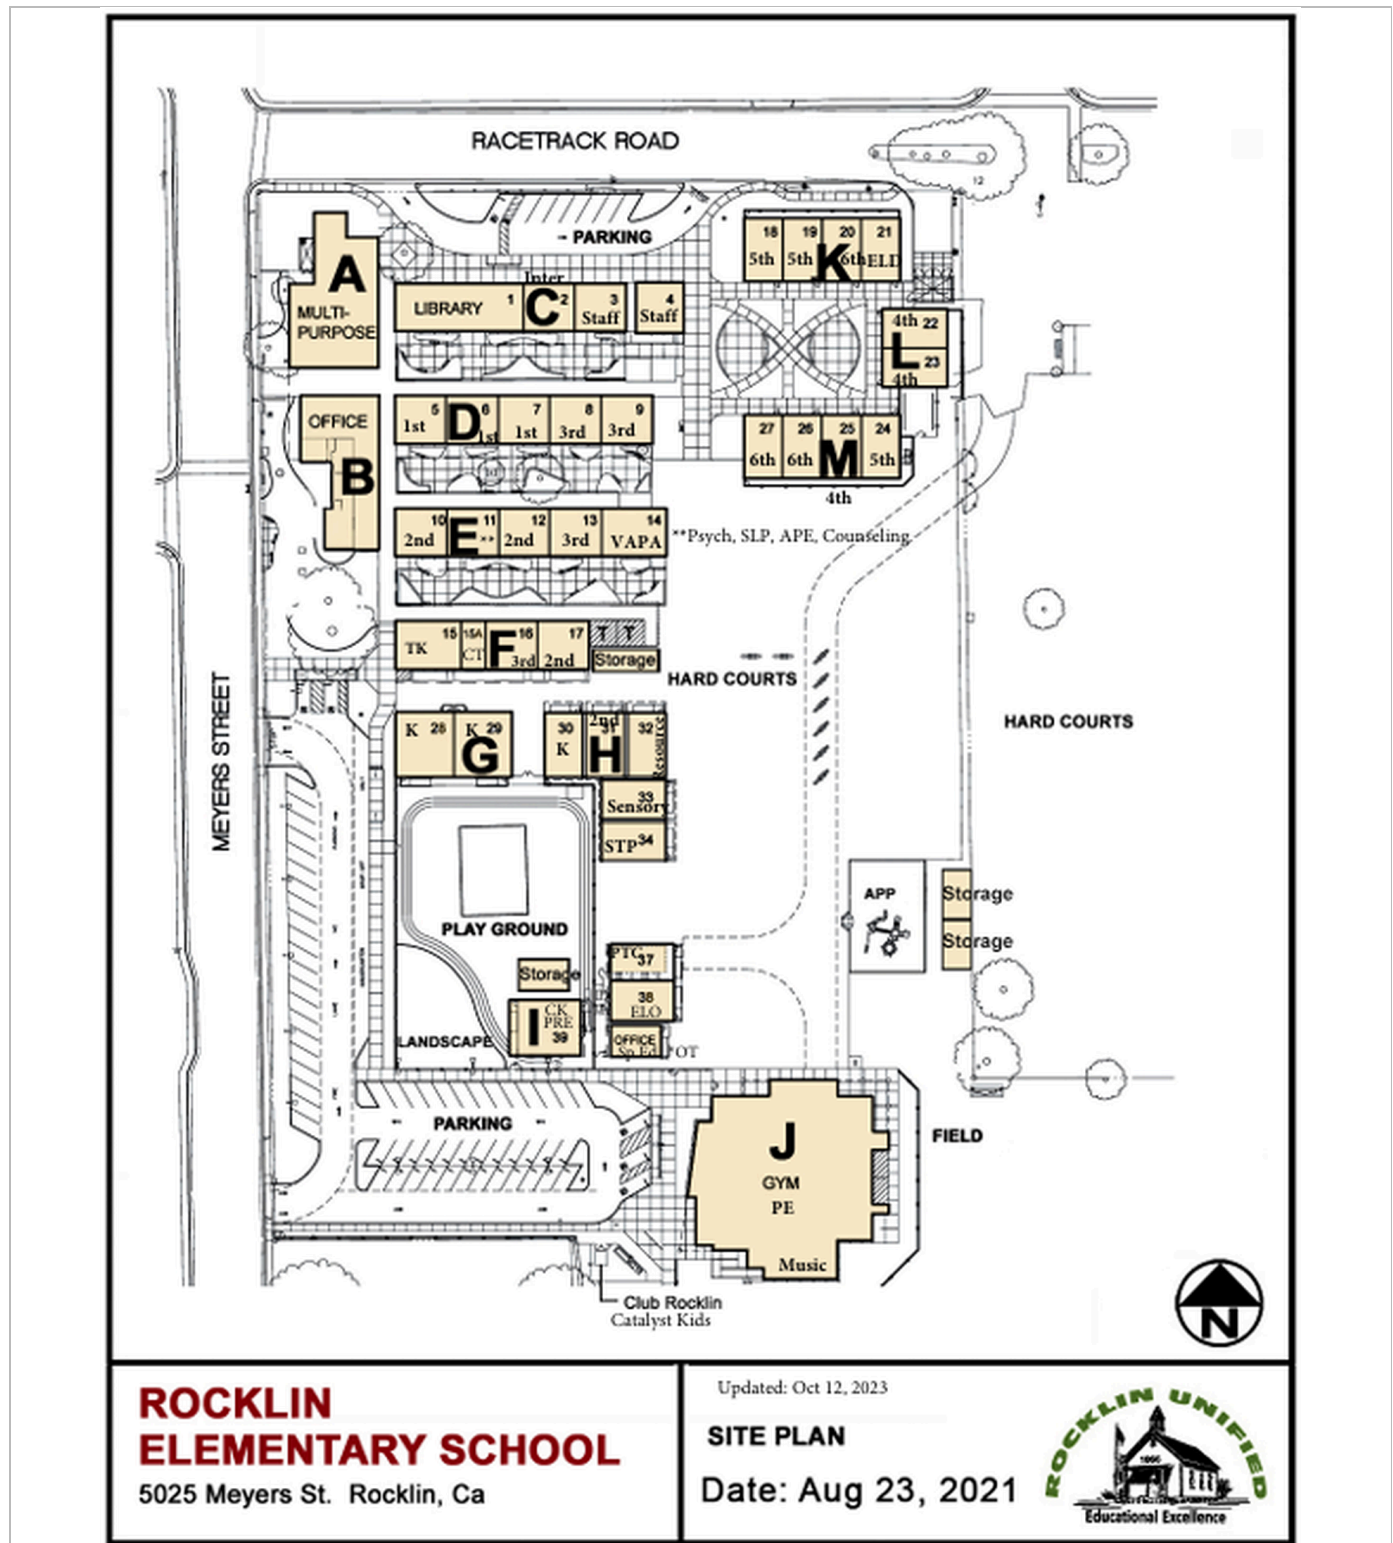

Rocklin Elementary School · Building Index and Field Notes

5025 Meyers Street, Rocklin, CA 95677. Building letters and room counts from Appendix C. Appendix C's site summary states 14 buildings and approximately 39 rooms; 13 buildings are tabulated below. Confirm in the field.

BLDG	DESCRIPTION AND SERVING SWITCH	ROOMS	DROPS PER ROOM	YOUR OBSERVED COUNT	PATHWAY / ACCESS NOTES
A	Multi-Purpose Room RE-A-CX6300-2, RE-A-Basement-15	0	12		
B	Office / Administration No closet shown; appears served from Building C. Confirm.	0	12		
C	Library, Rooms 1-4 RE-C-CX6400-1 · MDF / core	4	12		
D	Rooms 5-9 RE-D-5-CX6300-3	5	12		
E	Rooms 10-14 RE-E-10-CX6300-4	5	12		
F	Rooms 15, 15A, 16, 17 RE-F-15-CX6300M-5	4	12		
G	Rooms 28-29 RE-G-CX6300M-6	2	12		
H	Rooms 30-34 RE-P-31-CX6300-12, RE-P-33-CX6300-10	5	12		
J	Gym / PE / Music Confirm serving closet in the field.	1	12		
K	Rooms 18-21 RE-H-21-CX6300-7 · Site plan K = InterMapper H	4	12		
L	Rooms 22-23 RE-I-22-CX6300-8 · Site plan L = InterMapper I	2	12		
M	Rooms 24-27 RE-J-27-CX6300-9 · Site plan M = InterMapper J	4	12		
PTC	Rooms 37, 38 (PTC / ELO) RE-P-37-CX6300-11 · Unlettered cluster on the site plan	2	12		

Appendix C notes that RE-P-40-CX6300-13 serves a Room 40 not shown on the 2023 site plan. Confirm in the field.

Rocklin Elementary School · MDF and IDF Checklist

14 MDF / IDF locations. Existing cabinet, new cabinet, patch panel and cable management entries are Appendix C's rough indication of what each location needs. Appendix C provides that rack unit availability, cabinet depth, patch panel counts, cable management counts and clearances **must be verified in the field**. They are indications for verification, not fixed replacement requirements. Cabinet sizes and configurations are addressed in the October 14 addendum.


MDF / IDF (SWITCH)	EXIST. CAB.	NEW CAB.	24-PT PANELS	CABLE MGMT	FIELD NOTES · RACK UNITS, DEPTH, CLEARANCE, ACCESS
RE-A-CX6300-2	N	N	6	2	
RE-A-Basement-15	N	N	0	—	
RE-C-CX6400-1 MDF / core	Y	Y	4	1	
RE-D-5-CX6300-3	Y	Y	5	1	
RE-E-10-CX6300-4	Y	Y	5	1	
RE-F-15-CX6300M-5	Y	Y	4	1	
RE-G-CX6300M-6	Y	Y	5	1	
RE-H-21-CX6300-7	Y	Y	2	1	
RE-I-22-CX6300-8	Y	Y	2	1	
RE-J-27-CX6300-9	Y	Y	2	1	
RE-P-31-CX6300-12	Y	Y	2	1	
RE-P-33-CX6300-10	Y	Y	2	1	
RE-P-37-CX6300-11	Y	Y	2	1	
RE-P-40-CX6300-13	Y	Y	2	1	

Fiber

Existing fiber terminations, light interconnect units and backbone patching in these cabinets stay as they are. Do not price them, and protect them while working. Where new cabinets are required, fiber is pulled back, protected and installed into the new cabinet. No fiber is replaced, re-terminated or tested under this RFP.

Rocklin High School · Campus Site Plan

Reproduced from RFP 26-110, page 27. Dated August 23, 2021. Carries the legend identifying every building letter, the relocatable groups R and V with room numbers, and the numbered athletic and site facilities 1 through 8, including the Aquatic Center as facility 8. **The site plan legend governs building identification where an appendix disagrees.** 5301 Victory Lane, Rocklin, CA 95765.

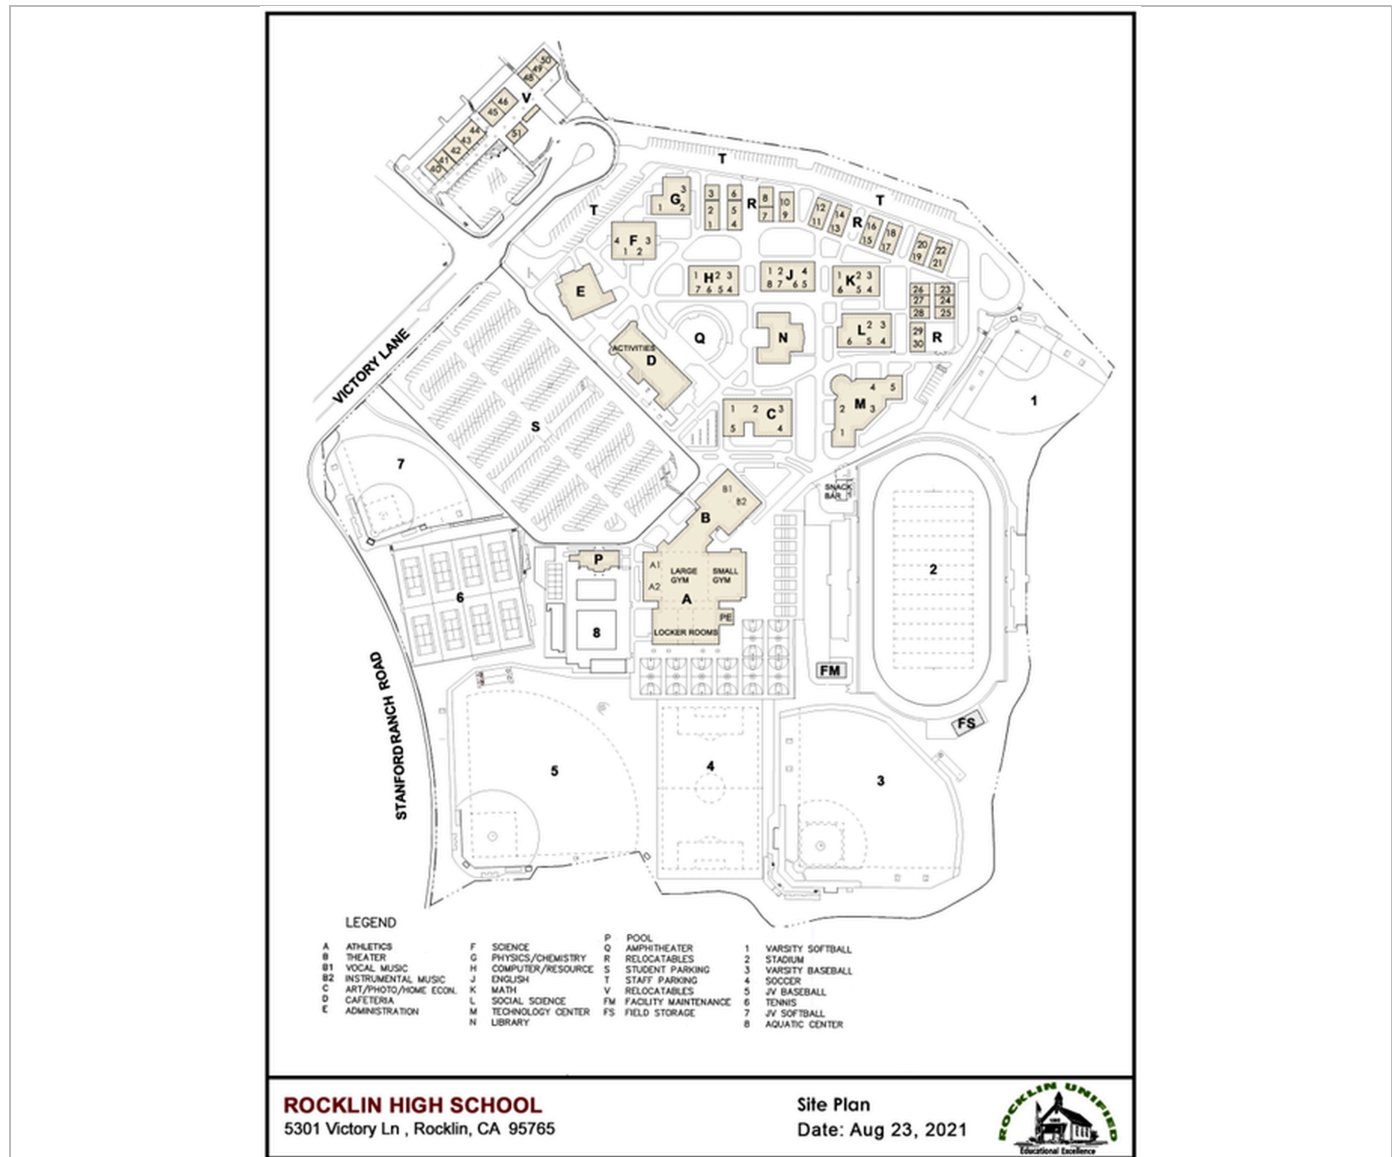

LEGEND, TRANSCRIBED FROM THE SITE PLAN

A Athletics	F Science	P Pool	1 Varsity Softball
B Theater	G Physics / Chemistry	Q Amphitheater	2 Stadium
B1 Vocal Music	H Computer / Resource	R Relocatables	3 Varsity Baseball
B2 Instrumental Music	J English	S Student Parking	4 Soccer
C Art / Photo / Home Econ.	K Math	T Staff Parking	5 JV Baseball
D Cafeteria	L Social Science	V Relocatables	6 Tennis
E Administration	M Technology Center	FM Facility Maintenance	7 JV Softball
	N Library	FS Field Storage	8 Aquatic Center

Rocklin High School · Building Index and Field Notes

5301 Victory Lane, Rocklin, CA 95765. 18 buildings, approximately 90 rooms, 35 MDF / IDF locations. **Administration is Building E.**

BLDG	DESCRIPTION AND SERVING SWITCH	ROOMS	DROPS PER ROOM	YOUR OBSERVED COUNT	PATHWAY / ACCESS NOTES
A	Athletics: Large Gym, Small Gym, A1, A2, PE, Locker Rooms RH-A-CX6300-24, RH-A-CX6300M-30	2	12		
B	Theater: B1 Vocal Music, B2 Instrumental Music RH-B-TH-DR-CX6300-25	2	12		
C	Art / Photo / Home Economics, Rooms 1-5 RH-C-4-CX6300M-26	5	12		
D	Cafeteria / Activities RH-D-CX6300-22, RH-D-ASB-CX6300-28	1	12		
E	Administration RH-E-CX6405-1 · MDF / core	0	12		
F	Science, Rooms 1-4 RH-F-CX6300-5	4	12		
FM	Facility Maintenance RH-FM-CX6300-20	0	12		
Football	Ticket Booth / Press Box RH-Football-TB-CX6100-32, RH-Football- PB-CX6100-33	0	12		
G	Physics / Chemistry, Rooms 1-3 RH-G-CX6300-6 · Site map label overprinted; G may contain two switches. Confirm.	3	12		

Rocklin High School · Building Index and Field Notes (continued)

BLDG	DESCRIPTION AND SERVING SWITCH	ROOMS	DROPS PER ROOM	YOUR OBSERVED COUNT	PATHWAY / ACCESS NOTES
H	Computer / Resource, Rooms 1-7 RH-H-1-CX6300-7, RH-H-7-CX6300-8	7	12		
J	English, Rooms 1-8 RH-J-1-CX6300-9, -10, RH-J-1-Tech- CX6300-2, RH-J-2-CX6300-35	8	12		
K	Math, Rooms 1-6 RH-K-5-CX6300-11	6	12		
L	Social Science, Rooms 2-6 RH-L-CX6300-12	5	12		
M	Technology Center, Rooms 1-5 RH-M-CX6400-23 · Appendix A notes approx. 40 computer stations in each of three labs	5	12		
N	Library RH-N-CU-CX6300-34	1	12		
Pool	Aquatic Center RH-Pool-CX6200-31 · Site plan facility 8	1	see Oct 14 addendum		
R	Relocatables, Rooms 1-30 RH-R-3, -8, -12, -16, -20, -27, -29 CX6300- 13 through -19	30	12		
V	Relocatables, Rooms 40-46 and 48-51 RH-V-Annex-CX6300-3, -4, RH-V-43- CX6300-27, RH-V-49-CX6300-29, RH-V- 51-CX6300M-21 · Room 47 not shown on the site plan	11	12		

The Pool configuration and the treatment of office, administrative and computer-lab outlets are among the items answered in the October 14 addendum.

Rocklin High School · MDF and IDF Checklist

35 MDF / IDF locations. Entries are Appendix C's rough indication only. Rack unit availability, cabinet depth, patch panel counts, cable management counts and clearances must be verified in the field.

MDF / IDF (SWITCH)	EXIST. CAB.	NEW CAB.	24-PT PANELS	CABLE MGMT	FIELD NOTES
RH-A-CX6300-24	Y	Y	3	1	
RH-A-CX6300M-30	Y	Y	3	1	
RH-B-TH-DR-CX6300-25	Y	Y	3	1	
RH-C-4-CX6300M-26	Y	Y	2	1	
RH-D-CX6300-22	Y	Y	2	1	
RH-D-ASB-CX6300-28	Y	Y	1	1	
RH-E-CX6405-1 MDF / core	N	N	6	2	
RH-F-CX6300-5	Y	Y	4	1	
RH-FM-CX6300-20	Y	Y	1	1	
RH-Football-TB-CX6100-32	N	N	1	1	
RH-Football-PB-CX6100-33	Y	Y	1	1	
RH-G-CX6300-6 confirm 2nd switch	Y	Y	4	1	
RH-H-1-CX6300-7	Y	Y	5	1	
RH-H-7-CX6300-8	Y	Y	5	1	
RH-J-1-CX6300-9	Y	Y	2	1	
RH-J-1-CX6300-10	Y	Y	2	1	
RH-J-1-Tech-CX6300-2	Y	Y	2	1	
RH-J-2-CX6300-35	Y	Y	2	1	

Rocklin High School · MDF and IDF Checklist (continued)

MDF / IDF (SWITCH)	EXIST. CAB.	NEW CAB.	24-PT PANELS	CABLE MGMT	FIELD NOTES
RH-K-5-CX6300-11	N	N	4	1	
RH-L-CX6300-12	N	N	4	1	
RH-M-CX6400-23	N	N	10	3	
RH-N-CU-CX6300-34	N	Y	6	2	
RH-Pool-CX6200-31	Y	Y	1	1	
RH-R-3-CX6300-13	Y	Y	3	1	
RH-R-8-CX6300-14	Y	Y	3	1	
RH-R-12-CX6300-15	Y	Y	3	1	
RH-R-16-CX6300-16	Y	Y	3	1	
RH-R-20-CX6300-17	Y	Y	3	1	
RH-R-27-CX6300-18	Y	Y	3	1	
RH-R-29-CX6300-19	Y	Y	3	1	
RH-V-Annex-CX6300-3	Y	Y	3	1	
RH-V-Annex-CX6300-4	Y	Y	3	1	
RH-V-43-CX6300-27	Y	Y	3	1	
RH-V-49-CX6300-29	Y	Y	3	1	
RH-V-51-CX6300M-21	Y	Y	2	1	

There are no access restrictions. Every building and space within the scope of this RFP is available to Responders at the project walk and during performance of the work.

Numbering standards for each site must be verified with the District **before any new cabling is pulled**. Failure to verify may require renumbering all or part of the project at the contractor's expense (Requirement 16).

RFP 26-110 · Project Walk Packet · October 10, 2026

Rocklin Unified School District

2615 Sierra Meadows Drive · Rocklin, CA 95677

Phone · (916) 624-2428 Fax · (916) 624-7246



Roger Stock, Superintendent
Jennifer Stahlheber, Deputy Superintendent Business & Operations

Elisabeth Casey, Associate Superintendent, Educational Services
Marty Flowers, Associate Superintendent, Secondary Education
Mike Henderson, Associate Superintendent, Human Resources
Bill MacDonald, Associate Superintendent, Elementary Education

APPENDIX C

RFP 26-110 — Cabling Infrastructure

Site Reference Data — Rough Estimate

E-Rate Funding Year 2027 (YR30)

Issued with the RFP on September 9, 2026 · Rocklin Unified School District

Purpose

This APPENDIX C is issued as part of RFP 26-110 and forms a part of the RFP documents. It provides the District’s rough field estimate of existing conditions at the two (2) school sites covered by this solicitation. It is provided so that Responders have a common starting point for scale and feasibility.

THIS IS A COPPER-ONLY PROJECT. Every figure in this APPENDIX C describes CAT6A copper work. The District’s fiber backbone — MDF to every IDF and to the edge switches at both sites — was recently upgraded, remains in service, and is NOT part of this solicitation. No fiber is to be furnished, installed, replaced, re-terminated or tested. See “Not in Scope — Existing Fiber Backbone” in the RFP.

FOR REFERENCE ONLY — THIS IS NOT A BID DOCUMENT.

This APPENDIX C is not intended to be, and shall not be used as, the document from which a Responder produces its bid proposal. It gives an idea of scale and of the maximum cable run in each building, nothing more.

This is a means-and-methods (ways-and-means) solicitation.

The figures in this APPENDIX C - are rough estimates prepared by District staff. They are not a quantity takeoff, not a bill of materials, and not a survey. Each Responder remains solely responsible for

Board Members: Julie Hupp · Tiffany Saathoff · Michelle Sutherland · Dereck Counter · Rachelle Price

performing its own due diligence, for gathering the information it needs, for asking the questions it needs answered through the process set out in the RFP, and for determining all cable lengths, cable and material quantities, pathway requirements, and labor necessary to deliver a complete, labeled, tested, and certified installation at each site.

- No claim for additional compensation based on a variance between these figures and actual field conditions will be considered, except where the District issues a written change in scope.
- Where this APPENDIX C and the body of the RFP conflict, the body of the RFP governs.
- Questions regarding this APPENDIX C follow the same process and deadline as the RFP: in writing to ts.rfp@rocklinusd.org on or before October 23, 2026 at 3:00 p.m.

How to read the columns

Building	The building or area as it is named on the campus PDF map uploaded to the E-Rate Productivity Center (EPC). One row per building. This is the unit the District prices and releases: the Schedule of Values in the RFP carries one line for each building listed here, and a building served by more than one closet is still a single line.
Max Length (ft.)	The longest single cable path in that building, measured from the serving switch to the furthest drop. Cable path length, not straight-line distance, and rounded up to the nearest five feet. It is a worst-case bound, not an average and not a total.
Rooms per Building	The number of classrooms in that building is scheduled to receive the new cabling standard. Offices, common rooms, and other unspecified spaces are excluded from this standard — existing drops will be replaced one for one and where needed two (2) drops per access point where only one (1) drop exists.
Drops per Room	Drops per classroom under the standard defined in the Scope of Work: TWELVE (12) CAT6A drops — four (4) in the ceiling (two terminated into the existing access point, two for future use), six (6) at two (2) wall locations of three each, and two (2) at the IP speaker location (one replacing the existing speaker cable, one terminated, labeled, tested and coiled above for future use).
Extra Cables Needed	Additional cable runs in that building beyond the classroom standard — cameras, interior speakers in spaces that are not counted classrooms, and indoor and exterior horn speakers. Derived from the District device counts in the Device Counts table for that site: CAMERAS + (SPEAKER DEVICES – ROOMS PER BUILDING), floored at zero, because every counted classroom already carries two drops at its IP speaker under the twelve-drop standard. Analog clocks are battery powered and take no cable, so they are listed but not counted. The District provides these quantities; understanding each device type and its requirements remains the Responder's due diligence. Stated as a count of runs.
Notes	Serving MDF or IDF, how the length was obtained, and any condition a Responder should expect to find.

How this data is used

- Pricing is BY SCHOOL SITE AND BY BUILDING. The Schedule of Values in the RFP carries one priced line for every building listed in this APPENDIX C, a subtotal and 10% contingency for each site, and a grand total for both sites.
- The District may issue a notice to proceed for any single building, in any order, at any point in the contract term. The per-building price governs that release.
- The contract term is April 1, 2027 through September 30, 2028. Sequencing is directed by the District and is dictated by facilities modernization planning and the District’s architects. E-Rate eligible Category 2 work may be purchased on or after April 1, 2027 and must be delivered and installed no later than September 30, 2028.
- Buildings are the pricing unit; closets are the cabinet unit. The cabling table below is one row per building; the cabinets and patch management table is one row per MDF / IDF.
- Room counts are read from the District site plans and are APPROXIMATE. They give a sense of scale; they are not a verified count and are not a commitment to a quantity.
- External speakers, cameras, clocks and similar devices are IN ADDITION to the twelve (12) drop classroom standard. They belong in the Extra Cables Needed column. The District provides quantities; understanding each device remains the Responder’s due diligence.
- A DEVICE COUNTS table follows the cabling table for each site. It lists, per building, the cameras, interior speakers, indoor horn speakers, exterior horn speakers and clocks the District has on record, and the resulting Extra Cable Runs figure. The counts come from District records of differing vintage and precision — see the source line above each table. They are a starting point, not a specification, and not a survey.
- Analog clocks are battery powered and are NOT cabled. They are listed only so a Responder knows they are present in the space and can plan around them.
- An EXISTING DEVICE LOCATIONS table follows the device counts for each site, giving the actual named camera and exterior speaker positions, and an ATHLETIC AND SITE FACILITIES table lists the fields, courts and stadium areas that carry scoreboards, sports cameras and other cabled equipment. EVERY CURRENTLY CABLED DEVICE AT BOTH SITES IS IN SCOPE — its cabling shall be replaced or updated, terminated, labeled, tested, certified and reconnected in working order, whether or not it appears by name in this APPENDIX C.
- Estimated cable footage is REFERENCE ONLY. It is calculated, not measured: $\text{Max Length} \times ((\text{Rooms per Building} \times \text{Drops per Room}) + \text{Extra Cables Needed}) \times 1.30$, where 1.30 is a thirty percent (30%) allowance for routing, slack, service loops and waste. A companion workbook, “RFP 26-110 Cabling Quantity Estimator.xlsx,” carries the same formula live and is issued with this APPENDIX C.

Cabinets and patch management

A second table per site lists every MDF and IDF location identified on the District network map, together with the switch installed there. The Responder is to price cabinets, COPPER patch panels, and cable management for these locations per the Scope of Work. Existing fiber terminations, light interconnect units and backbone patching in these cabinets stay as they are — do not price them, and protect them while working. Where new cabinets are required, fiber needs to be pulled back, protected, and installed into new cabinets. Cabinet, panel, and management entries are the District’s rough indication of what

each location needs; rack unit availability, cabinet depth, patch panel counts, cable management counts, and clearances must be verified in the field.

MDF / IDF (switch)	The closet or equipment location, identified by the switch installed there as shown on the District network map.
Existing Cabinet	Type and size of the cabinet or rack already in place, and whether it has usable capacity for the new work.
New Cabinet Needed	Whether a new cabinet or rack is required at that location, and the type indicated.
24-Port Patch Panels	The number of 24-port CAT6A patch panels the location is expected to require, including spare port capacity.
Cable Management	Horizontal and vertical cable management indicated for that location.
Notes	Switch chassis, rack units available, power, grounding, and any condition affecting the installation.

Site Reference Data

Buildings and room counts are read from the District site plans; MDF / IDF locations and switch names come from the District network map; camera, speaker and clock counts come from District device records. Room counts and device counts are approximate. Max Length and the cabinet columns are for the District to complete.

Rocklin Elementary School

5025 Meyers Street, Rocklin, CA 95677

14 buildings · approximately 39 rooms · 14 MDF / IDF locations.

Buildings and room counts: District site plan dated Aug 23, 2021, updated Oct 12, 2023. MDF / IDF locations: District network map, August 2026.

Cabling

Estimated Cable (ft.) = Max Length × ((Rooms per Building × Drops per Room) + Extra Cables Needed) × 1.30

Reference only. Maximum length carried across every run in the building — the classroom drops and the extra device runs alike — plus 30%. Not a takeoff and not a basis for bid.

Building	Max Length (ft.)	Rooms per Building	Drops per Room	Extra Cables Needed	Estimated Cable (ft.)	Notes
A	200	0	12	3	780	Multi-Purpose Room · Serving switches: RE-A-CX6300-2, RE-A-Basement-15
B	66	0	12	32	2746	Office / Administration · No closet shown; appears served from Building C.
C	222	4	12	36	24242	Library, Rooms 1-4 · Serving switch: RE-C-CX6400-1 · MDF / core.
D	222	5	12	2	17893	Rooms 5-9 · Serving switch: RE-D-5-CX6300-3
E	222	5	12	6	19048	Rooms 10-14 · Serving switch: RE-E-10-CX6300-4
F	222	4	12	1	14141	Rooms 15, 15A, 16, 17 · Serving switch: RE-F-15-CX6300M-5
G	220	2	12	4	18304	Rooms 28-29 · Serving switch: RE-G-CX6300M-6
H	90	5	12	2	3042	Rooms 30-34 · Serving switches: RE-P-31-CX6300-12, RE-P-33-CX6300-10
J	150	1	12	24	7020	Gym / PE / Music · Confirm serving closet in the field.
K	141	4	12	0	8798	Rooms 18-21 · Serving switch: RE-H-21-CX6300-7 · Site plan K = InterMapper H.
L	75	2	12	1	2438	Rooms 22-23 · Serving switch: RE-I-22-CX6300-8 · Site plan L = InterMapper I.
M	141	4	12	5	9715	Rooms 24-27 · Serving switch: RE-J-27-CX6300-9 · Site plan M = InterMapper J.

Building	Max Length (ft.)	Rooms per Building	Drops per Room	Extra Cables Needed	Estimated Cable (ft.)	Notes
PTC	133	2	12	1	4323	Rooms 37, 38 (PTC / ELO) · Serving switch: RE-P-37-CX6300-11 · Unlettered cluster on the site plan. RE-P-40-CX6300-13 serves a Room 40 not shown on the 2023 site plan — confirm in the field.

Device Counts

Extra Cable Runs = Cameras + (Interior Speakers + Indoor Horns + Exterior Horns – Rooms per Building), floored at zero.

18 cameras · 51 interior speakers · 3 indoor horn speakers · 14 exterior horn speakers · 55 clocks (not cabled) · 47 extra cable runs.

Speakers, horns and clocks: District IP speaker and clock quotation SI-20240501-1234, May 2024 (51 interior speakers, 17 horn speakers, 56 clocks). Cameras: District camera coverage map — APPROXIMATE, read from marker positions; no camera name list was available for this site.

Building	Cameras	Interior Speakers	Indoor Horns	Exterior Horns	Clocks (no cable)	Extra Cable Runs	Notes
A	—	2	1	—	4	3	Multi-Purpose Room / cafeteria. Quote letter "A" split between site-plan A and B; Multi-In-SW is an indoor horn.
B	2	6	—	2	6	10	Office / Administration. Exterior horns Admin-Front-S and SPK-Out-B-E. Camera count read from the coverage map.
C	3	4	—	1	5	4	Exterior horn SPK-Out-C1-N.
D	1	5	—	1	5	2	Exterior horn SPK-Out-D5-E.
E	1	9	—	1	9	6	Exterior horn SPK-Out-E-10-E. Nine interior speakers across rooms 10-14 plus 11C, 11D and E-PSY.
F	1	3	—	1	4	1	Exterior horn SPK-Out-F-Stor-E.
G	3	2	—	1	2	4	Exterior horn SPK-Out-G-29-S.
H	—	5	—	2	5	2	Rooms 30-34. Exterior horns SPK-Out-H-31-W and SPK-Out-H-34-E.
J	3	1	2	3	1	8	Gym / PE / Music. Indoor horns Gym-In-NE and Gym-In-SW; exterior horns SPK-Out-J-W, -J-E and -J-N.
K	—	4	—	—	4	0	
L	1	2	—	—	2	1	

Building	Cameras	Interior Speakers	Indoor Horns	Exterior Horns	Clocks (no cable)	Extra Cable Runs	Notes
M	3	4	—	2	4	5	Exterior horns SPK-Out-M-25-N and SPK-Out-M-25-S.
PTC	—	3	—	—	3	1	Rooms 37, 38 and the old OT office. Carried under quote letter "H"; separated here to match the site plan.
SITE TOTAL	18	51	3	14	55	47	

Existing Device Locations

Where the existing cameras and exterior speakers actually are. Every device listed is in scope: its cabling shall be replaced or updated, terminated, labeled, tested, certified and reconnected in working order.

Horn speaker names are reproduced verbatim from the May 2024 IP speaker quotation; “-In-” denotes an indoor horn. Camera positions are read from the District coverage map and are APPROXIMATE — no camera name list exists for this site, so the Responder shall confirm every camera position in the field.

Building	Existing Camera Locations	Existing Exterior and Horn Speaker Locations
A	—	Multi-In-SW (indoor horn, Multi-Purpose Room)
B	2 — west elevation of the Office / Administration building, covering the front entry and the Meyers Street approach	Admin-Front-S, SPK-Out-B-E
C	3 — north elevation of the Library / Staff wing: one at the west end, two clustered toward the parking lot	SPK-Out-C1-N
D	1 — west end of the D wing	SPK-Out-D5-E
E	1 — west end of the E wing	SPK-Out-E-10-E
F	1 — west end of the F wing, near Storage	SPK-Out-F-Stor-E
G	3 — west end of the G wing, covering the playground and the kindergarten lot	SPK-Out-G-29-S
H	—	SPK-Out-H-31-W, SPK-Out-H-34-E
J	3 — Gym / PE / Music: two on the north elevation, one on the west approach from the parking lot	Gym-In-NE (indoor horn), Gym-In-SW (indoor horn), SPK-Out-J-W, SPK-Out-J-E, SPK-Out-J-N
L	1 — east side, near rooms 22-23	—
M	3 — south elevation of the M wing, near the Psych / SLP / APE / Counseling area	SPK-Out-M-25-N, SPK-Out-M-25-S

Athletic and Site Facilities

Scoreboards, sports cameras, press box and ticket booth equipment, and every other currently cabled device at these facilities are IN ADDITION to the building counts above and are in scope. The District has not inventoried them; quantities and conditions are to be established by the Responder at the project walk.

Facility / Area	Existing Cabled Equipment to Account For
Playground and hard courts	Exterior horn coverage from the G wing and the Gym. No scoreboard on the 2023 site plan — verify in the field.
Field (east of the Gym)	Gym exterior horns SPK-Out-J-W, -J-E and -J-N provide field coverage.

Cabinets and Patch Management

MDF / IDF (switch)	Existing Cabinet	New Cabinet Needed	24-Port Patch Panels	Cable Management	Notes
RE-A-CX6300-2	N	N	6	2	CX6300
RE-A-Basement-15	N	N	0		CX6300
RE-C-CX6400-1	Y	Y	4	1	CX6400 — MDF / core
RE-D-5-CX6300-3	Y	Y	5	1	CX6300
RE-E-10-CX6300-4	Y	Y	5	1	CX6300
RE-F-15-CX6300M-5	Y	Y	4	1	CX6300M
RE-G-CX6300M-6	Y	Y	5	1	CX6300M
RE-H-21-CX6300-7	Y	Y	2	1	CX6300
RE-I-22-CX6300-8	Y	Y	2	1	CX6300
RE-J-27-CX6300-9	Y	Y	2	1	CX6300
RE-P-31-CX6300-12	Y	Y	2	1	CX6300
RE-P-33-CX6300-10	Y	Y	2	1	CX6300
RE-P-37-CX6300-11	Y	Y	2	1	CX6300
RE-P-40-CX6300-13	Y	Y	2	1	CX6300

Building B (Gym / Library) shows no closet of its own on the site map and appears to be served from the C-wing MDF. Confirm in the field.

Rocklin High School

5301 Victory Lane, Rocklin, CA 95765

18 buildings · approximately 90 rooms · 35 MDF / IDF locations.

Buildings and room counts: District site plan dated Aug 23, 2021. MDF / IDF locations: District network map, August 2026.

Cabling

Estimated Cable (ft.) = Max Length × ((Rooms per Building × Drops per Room) + Extra Cables Needed) × 1.30

Reference only. Maximum length carried across every run in the building — the classroom drops and the extra device runs alike — plus 30%. Not a takeoff and not a basis for bid.

Building	Max Length (ft.)	Rooms per Building	Drops per Room	Extra Cables Needed	Estimated Cable (ft.)	Notes
A	190	2	12	28	12844	Athletics — Large Gym, Small Gym, A1, A2, PE, Locker Rooms · Serving switches: RH-A-CX6300-24, RH-A-CX6300M-30
B	290	2	12	24	18096	Theater — B1 Vocal Music, B2 Instrumental Music · Serving switch: RH-B-TH-DR-CX6300-25
C	135	5	12	6	11583	Art / Photo / Home Economics, Rooms 1-5 · Serving switch: RH-C-4-CX6300M-26
D	129	1	12	16	4696	Cafeteria / Activities · Serving switches: RH-D-CX6300-22, RH-D-ASB-CX6300-28
E	182	0	12	48	2366	Administration · Serving switch: RH-E-CX6405-1 · MDF / core.
F	150	4	12	6	10530	Science, Rooms 1-4 · Serving switch: RH-F-CX6300-5
FM	50	0	12	12	780	Facility Maintenance · Serving switch: RH-FM-CX6300-20
Football	95	0	12	1	741	Ticket Booth / Press Box · Serving switches: RH-Football-TB-CX6100-32, RH-Football-PB-CX6100-33

G	150	3	12	3	7605	Physics / Chemistry, Rooms 1-3 · Serving switch: RH-G-CX6300-6 · Site map label overprinted; G may contain two switches. Confirm in the field.
H	190	7	12	1	20995	Computer / Resource, Rooms 1-7 · Serving switches: RH-H-1-CX6300-7, RH-H-7-CX6300-8
J	80	8	12	3	10296	English, Rooms 1-8 · Serving switches: RH-J-1-CX6300-9, RH-J-1-CX6300-10, RH-J-1-Tech-CX6300-2, RH-J-2-CX6300-35
K	80	6	12	1	7592	Math, Rooms 1-6 · Serving switch: RH-K-5-CX6300-11
L	135	5	12	4	11232	Social Science, Rooms 2-6 · Serving switch: RH-L-CX6300-12
M	180	5	12	84	20995	Technology Center, Rooms 1-5 · Serving switch: RH-M-CX6400-23
N	150	1	12	7	3705	Library · Serving switch: RH-N-CU-CX6300-34
Pool	180	1	6	0	1080	Aquatic Center · Serving switch: RH-Pool-CX6200-31
R	150	30	12	9	72735	Relocatables, Rooms 1-30 · Serving switches: RH-R-3-CX6300-13, RH-R-8-CX6300-14, RH-R-12-CX6300-15, RH-R-16-CX6300-16, RH-R-20-CX6300-17, RH-R-27-CX6300-18, RH-R-29-CX6300-19
V	170	11	12	5	9217	Relocatables, Rooms 40-46 and 48-51 · Serving switches: RH-V-Annex-CX6300-3, RH-V-Annex-CX6300-4, RH-V-43-CX6300-27, RH-V-49-CX6300-29, RH-V-51-CX6300M-21 · Room 47 not shown on the site plan.

Device Counts

Extra Cable Runs = Cameras + (Interior Speakers + Indoor Horns + Exterior Horns – Rooms per Building), floored at zero.

41 cameras · 119 interior speakers · 6 indoor horn speakers · 41 exterior horn speakers · 140 clocks (not cabled) · 117 extra cable runs. Speakers, horns and clocks: District workbook “Rocklin HS — Speaker Count,” January 20, 2025 (119 interior speakers, 6 indoor horns, 41 exterior horns, 140 clocks). Cameras: District camera list, 41 cameras, counted by the building letter carried in each camera name.

Building	Cameras	Interior Speakers	Indoor Horns	Exterior Horns	Clocks (no cable)	Extra Cable Runs	Notes
A	12	9	4	5	8	28	Athletics. Indoor horns: Small Gym (2), Big Gym (2). Exterior horns at PE-Female, PE locker-boys, Small Gym (2) and Big Gym. Twelve cameras: RH-A-N-CAM1-4, RH-A-S-CAM9-12, RH-A-W-CAM5-8.
B	1	5	—	—	5	4	Theater, lobby, studio, storage, stage and the B-1 / B-2 offices. Camera RH-B1-CAM1.
C	3	5	—	3	5	6	Exterior horns at C-2, C-3, C-4. Cameras RH-C-E-CAM3, RH-C-N-CAM1, RH-C-N-CAM2.
D	6	5	2	4	9	16	Cafeteria / Activities. Cafeteria carries 2 indoor and 2 exterior horns; further exterior horns at the custodian office and staff lounge. Cameras RH-D-NE-CAM1/2 (marked OLD on the District list) and RH-D-SW-CAM3-6.
E	—	7	—	3	24	10	Administration. Twenty-four clocks across the main office, counseling and the AP office. Exterior horns at the main office, counseling and attendance.
F	3	5	—	2	5	6	Includes an F-hallway speaker. Exterior horns at F-2 and F-4. Cameras RH-F-E-CAM3, RH-F-W-CAM1, RH-F-W-CAM2.
FM	—	1	—	1	1	2	Field office.
Football	—	—	—	1	1	1	Score box at the field carries one exterior horn and one clock.

RFP 26-110 — APPENDIX C — Site Reference Data

Building	Cameras	Interior Speakers	Indoor Horns	Exterior Horns	Clocks (no cable)	Extra Cable Runs	Notes
G	—	4	—	2	4	3	Speaker sheet shows G-1 through G-4; the site plan shows three rooms. Exterior horns at G-2 and G-3.
H	—	7	—	1	7	1	Exterior horn at H-2.
J	1	8	—	2	8	3	Exterior horns at J-3 and J-6. Camera RH-J-N-CAM1.
K	—	6	—	1	6	1	Exterior horn at K-2.
L	—	6	—	3	6	4	Speaker sheet shows L-1 through L-6; the site plan shows five rooms. Exterior horns at L-2, L-4 and L-6.
M	6	7	—	3	7	11	Technology Center. Includes two research-area speakers off M-3. Exterior horns at M-1, M-2 and M-5. Cameras RH-M-E-CAM3/4 and RH-M-S-CAM5-8.
N	2	3	—	3	3	7	Library. Exterior horns at the bookroom, a counseling office and the college / career center. Cameras RH-N-NE-CAM2 and RH-N-W-CAM1.
Pool	—	—	—	—	—	0	Not shown on the January 2025 speaker count. Verify in the field.
R	5	30	—	4	30	9	Thirty relocatables, one speaker and one clock each. Exterior horns at R-7, R-12, R-18 and R-24. Cameras RH-R7-S-CAM1, RH-R13-S-CAM1, RH-R23-E-CAM1/2, RH-R26-W-CAM1.
V	2	11	—	3	11	5	Rooms 40-46 and 48-51. Exterior horns at V-40, V-43 and V-48. Cameras RH-V-SE-CAM1 and RH-V-SE-CAM2.
SITE TOTAL	41	119	6	41	140	117	

Existing Device Locations

Where the existing cameras and exterior speakers actually are. Every device listed is in scope: its cabling shall be replaced or updated, terminated, labeled, tested, certified and reconnected in working order.

Camera names are reproduced verbatim from the District camera list. The name encodes the building and the compass elevation — RH-A-N-CAM1 is Building A, north elevation, camera 1. Speaker locations are the room-level rows of the January 2025 speaker count.

Building	Existing Camera Locations	Existing Exterior and Horn Speaker Locations
A	RH-A-N-CAM1, RH-A-N-CAM2, RH-A-N-CAM3, RH-A-N-CAM4, RH-A-S-CAM9, RH-A-S-CAM10, RH-A-S-CAM11, RH-A-S-CAM12, RH-A-W-CAM5, RH-A-W-CAM6, RH-A-W-CAM7, RH-A-W-CAM8	Physical Ed — Female (1 exterior); PE Locker — Boys (1 exterior); Small Gym (both sides) (2 indoor, 2 exterior); Big Gym (both sides) (2 indoor, 1 exterior)
B	RH-B1-CAM1	—
C	RH-C-N-CAM1, RH-C-N-CAM2, RH-C-E-CAM3	C-2 (1 exterior); C-3 (1 exterior); C-4 (1 exterior)
D	RH-D-NE-CAM1 (marked OLD), RH-D-NE-CAM2 (marked OLD), RH-D-SW-CAM3, RH-D-SW-CAM4, RH-D-SW-CAM5, RH-D-SW-CAM6	Cafeteria (2 indoor, 2 exterior); Custodian Office (1 exterior); Staff Lounge (1 exterior)
E	—	Main Office (1 exterior); Counseling Rooms (1 exterior); Attendance (1 exterior)
F	RH-F-W-CAM1, RH-F-W-CAM2, RH-F-E-CAM3	F-2 (1 exterior); F-4 (1 exterior)
FM	—	Field Office (1 exterior)
Football	—	Score Box — stadium field (1 exterior)
G	—	G-2 (1 exterior); G-3 (1 exterior)
H	—	H-2 (1 exterior)
J	RH-J-N-CAM1	J-3 (1 exterior); J-6 (1 exterior)
K	—	K-2 (1 exterior)
L	—	L-2 (1 exterior); L-4 (1 exterior); L-6 (1 exterior)
M	RH-M-E-CAM3, RH-M-E-CAM4, RH-M-S-CAM5, RH-M-S-CAM6, RH-M-S-CAM7, RH-M-S-CAM8	M-1 (1 exterior); M-2 (1 exterior); M-5 (1 exterior)
N	RH-N-W-CAM1, RH-N-NE-CAM2	Bookroom (1 exterior); Counseling Office (1 exterior); College / Career Center (1 exterior)
R	RH-R7-S-CAM1, RH-R13-S-CAM1, RH-R23-E-CAM1, RH-R23-E-CAM2, RH-R26-W-CAM1	R-7 (1 exterior); R-12 (1 exterior); R-18 (1 exterior); R-24 (1 exterior)
V	RH-V-SE-CAM1, RH-V-SE-CAM2	V-40 (1 exterior); V-43 (1 exterior); V-48 (1 exterior)

Athletic and Site Facilities

Scoreboards, sports cameras, press box and ticket booth equipment, and every other currently cabled device at these facilities are IN ADDITION to the building counts above and are in scope. The District has not inventoried them; quantities and conditions are to be established by the Responder at the project walk.

Facility / Area	Existing Cabled Equipment to Account For
Stadium (facility 2)	Football / track stadium. Scoreboard, press box, ticket booth and score box. Serving switches RH-Football-TB-CX6100-32 (ticket booth) and RH-Football-PB-CX6100-33 (press box). One exterior horn at the score box.
Varsity Softball (facility 1)	Scoreboard and any field-side camera or speaker.
Varsity Baseball (facility 3)	Scoreboard and any field-side camera or speaker.
Soccer (facility 4)	Any field-side scoreboard, camera or speaker.
JV Baseball (facility 5)	Scoreboard and any field-side camera or speaker.
Tennis (facility 6)	Any court-side camera or speaker.
JV Softball (facility 7)	Scoreboard and any field-side camera or speaker.
Aquatic Center (facility 8) / Pool	Scoreboard, timing system, and any deck camera or speaker. Serving switch RH-Pool-CX6200-31. Not shown on the January 2025 speaker count — verify in the field.
Field Maintenance (FM) and Field Storage (FS)	Field office carries one interior speaker and one exterior horn. Serving switch RH-FM-CX6300-20.

Cabinets and Patch Management

MDF / IDF (switch)	Existing Cabinet	New Cabinet Needed	24-Port Patch Panels	Cable Management	Notes
RH-A-CX6300-24	Y	Y	3	1	CX6300
RH-A-CX6300M-30	Y	Y	3	1	CX6300M
RH-B-TH-DR-CX6300-25	Y	Y	3	1	CX6300
RH-C-4-CX6300M-26	Y	Y	2	1	CX6300M
RH-D-CX6300-22	Y	Y	2	1	CX6300
RH-D-ASB-CX6300-28	Y	Y	1	1	CX6300
RH-E-CX6405-1	N	N	6	2	CX6405 — MDF / core
RH-F-CX6300-5	Y	Y	4	1	CX6300
RH-FM-CX6300-20	Y	Y	1	1	CX6300
RH-Football-TB-CX6100-32	N	N	1	1	CX6100
RH-Football-PB-CX6100-33	Y	Y	1	1	CX6100
RH-G-CX6300-6	Y	Y	4	1	CX6300 — see note below
RH-H-1-CX6300-7	Y	Y	5	1	CX6300
RH-H-7-CX6300-8	Y	Y	5	1	CX6300
RH-J-1-CX6300-9	Y	Y	2	1	CX6300
RH-J-1-CX6300-10	Y	Y	2	1	CX6300
RH-J-1-Tech-CX6300-2	Y	Y	2	1	CX6300
RH-J-2-CX6300-35	Y	Y	2	1	CX6300
RH-K-5-CX6300-11	N	N	4	1	CX6300
RH-L-CX6300-12	N	N	4	1	CX6300
RH-M-CX6400-23	N	N	10	3	CX6400
RH-N-CU-CX6300-34	N	Y	6	2	CX6300
RH-Pool-CX6200-31	Y	Y	1	1	CX6200
RH-R-3-CX6300-13	Y	Y	3	1	CX6300
RH-R-8-CX6300-14	Y	Y	3	1	CX6300
RH-R-12-CX6300-15	Y	Y	3	1	CX6300
RH-R-16-CX6300-16	Y	Y	3	1	CX6300
RH-R-20-CX6300-17	Y	Y	3	1	CX6300
RH-R-27-CX6300-18	Y	Y	3	1	CX6300
RH-R-29-CX6300-19	Y	Y	3	1	CX6300
RH-V-Annex-CX6300-3	Y	Y	3	1	CX6300
RH-V-Annex-CX6300-4	Y	Y	3	1	CX6300
RH-V-43-CX6300-27	Y	Y	3	1	CX6300
RH-V-49-CX6300-29	Y	Y	3	1	CX6300
RH-V-51-CX6300M-21	Y	Y	2	1	CX6300M

The site map shows the G-wing switch label overprinted by a second label; the G wing may contain two (2) switches. Confirm in the field.

Site Totals - Estimated

School Site	Buildings	MDF / IDF	Rooms in Scope	Drops (Rooms × 12)	Extra Cables	Patch Panels
Rocklin Elementary School	11	14	39	468	117	41
Rocklin High School	18	35	90	1,080	259	108
TOTAL — BOTH SITES	29	49	129	1,548	376	149

Extra Cables are cable runs for cameras and for speakers outside the counted classrooms and existing drops in administrative areas. Drops and Extra Cables are separate counts and are not added together above; a Responder pricing a building carries both.

End of APPENDIX C. Responders shall acknowledge receipt of this APPENDIX C by signing and returning it with their proposal, as required by the Notice to Responders.

Acknowledged by: _____ Date: _____

Company: _____