SCHUYLER COMMUNITY SCHOOL

Request for Proposal (RFP)

RFP: 10GB OM4 Fiber Optic	Proposal Due By: [4:00 pm CST Dec. 21, 2026]]

Project Overview:
SCHUYLER COMMUNITY SCHOOL is currently accepting proposals to extend the school's internal connections by adding 10 GB OM4 Multi-mode fiber optic cabling to specific locations on campus. See campus map for MDF / IDFs. An onsite survey is required.

Technical Criteria:
The selected bidder will be responsible for providing and installing (12) strand 10 GB OM4 Multi-mode fiber optic cabling to the locations listed on the campus map. All cabling must be visually and/or aesthetically pleasing. Cabling shall be tested and certified to meet TIA/EIA standards. School District shall be responsible for providing proper OM4 Multi-mode LC - LC patch cables to connect each fiber optic patch panel to network switches. When available, patch panel shall be installed in existing school owned network rack.

Locations:
(See Map Below)


Costs:
All costs included in proposal must be all-inclusive to include any outsourced or contracted work. Costs must be itemized to include an explanation of all fees associated with the final cost.

Evaluation Metrics and Selection Criteria

- 50% - Lowest cost
- 20% - Technical criteria
- 20% - Relevant Experience and Past Performance
- 10% - Local Support and On-Site Response Capability

Contact:
Vicki Jones
LAN Manager
SCHUYLER COMMUNITY SCHOOL
401 Adam St
Schuyler, NE 68661-2400
vicki.jones@schuylercommunityschools.org

FIGURE 3.1.3: FLOOR PLAN - PHASE 3

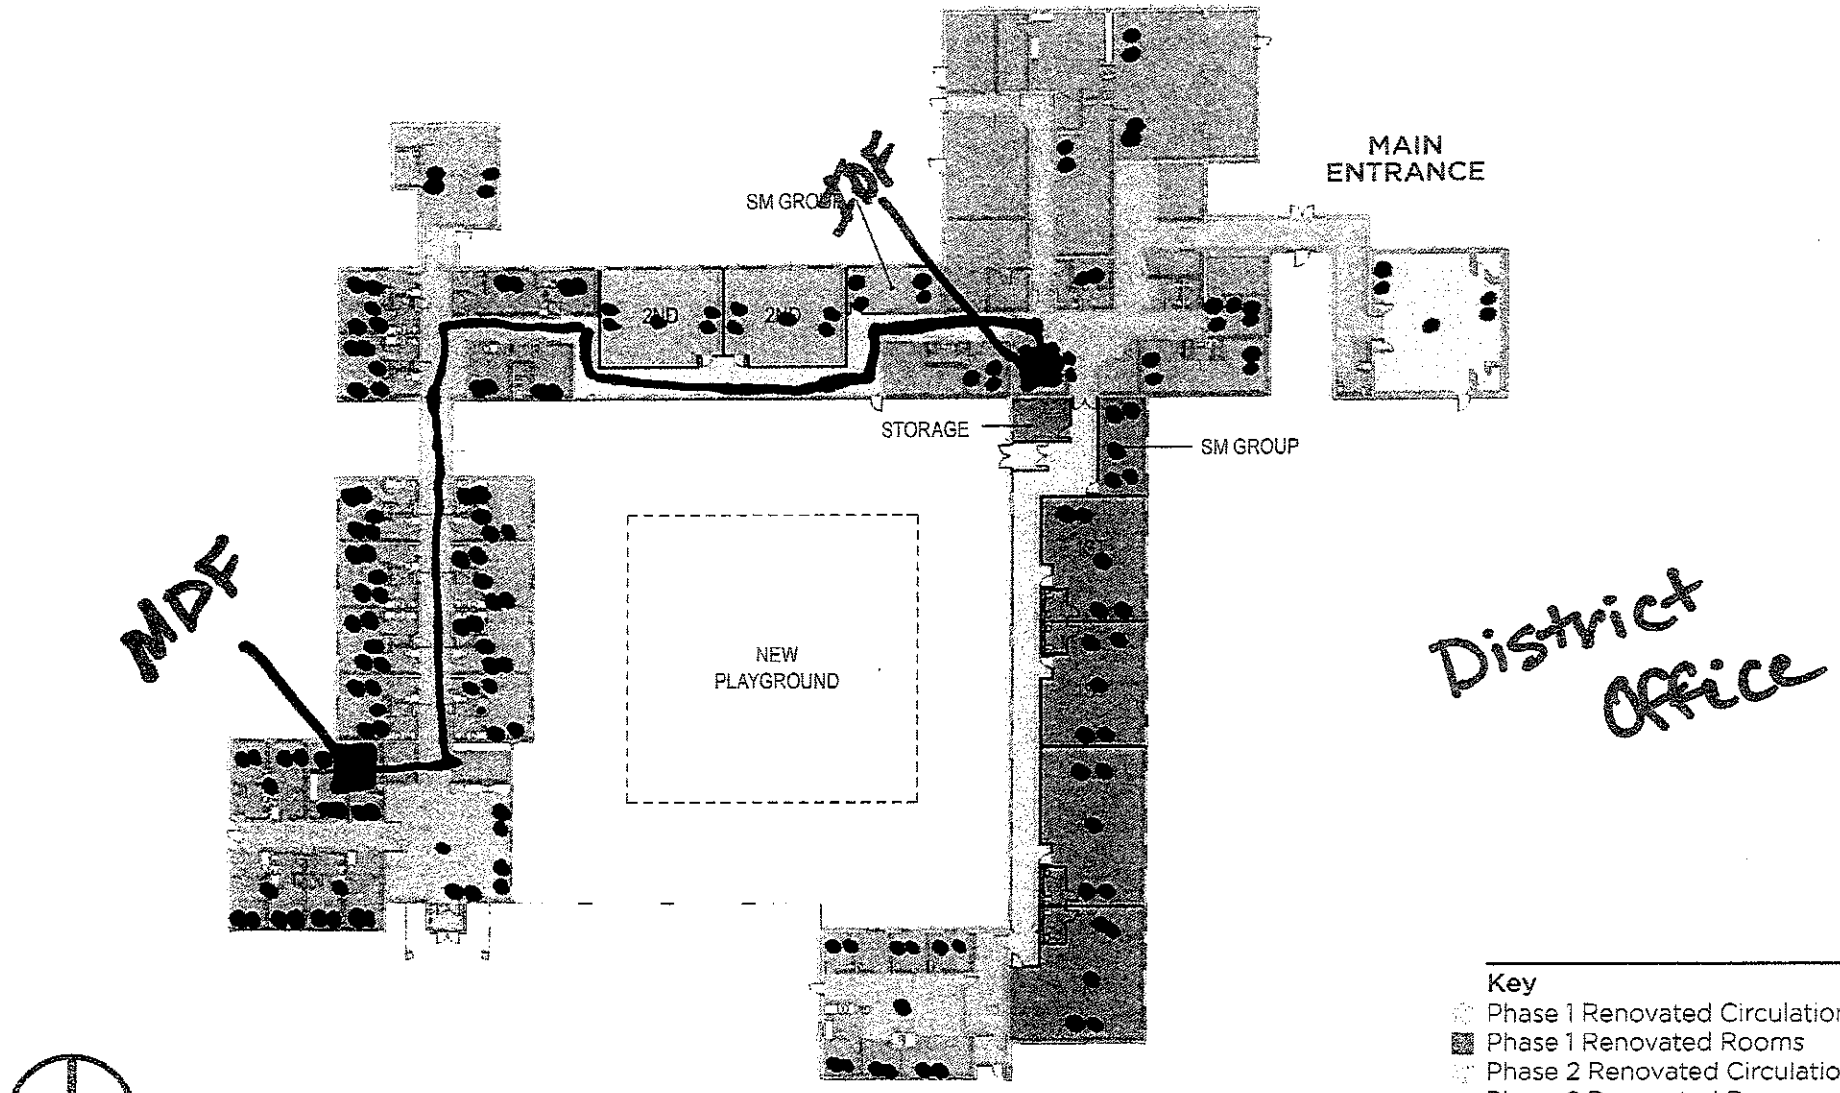

© 2021 Carlson West Povondra Architects